


RG-123/RG-123-1 Specifications

Voltage	24 Volts
Rated Capacity C ₁	11 AH
Maximum Weight	26 LB / 11.8 KG
Not Rated for Engine Starting	

Features

RG-123 Internal AC Heater controlled by redundant snap action thermal switches

Specifications are subject to change without notice

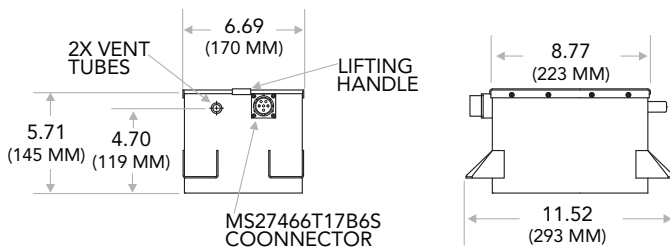

Standby and Emergency Power

Concorde's Emergency and Standby batteries are valve regulated sealed recombinant gas (RG®), constructed with advanced lead acid and absorbed glass mat (AGM) technology.

Designed to float directly on the DC buss, there is no need for a dedicated charger. The batteries are self regulating and can accept high inrush current for fast recovery.

- Maintenance free
- Constructed with non removable vent valves – no addition of electrolyte or water required
- Aerobatic: Non spillable at any altitude or attitude
- Factory tested to assure airworthiness
- Shipped fully charged and ready to install
- RG® Series is classified as unrestricted for land, sea or air transportation
- Available through a professional network of worldwide distributors

Concorde Battery Corporation

2009 San Bernardino Road, West Covina, CA 91790 USA
 Phone 626-813-1234 | Fax 626-813-1235

ISO 9001 + AS9100

The data/information contained herein has been reviewed & approved for general release on the basis that this document contains no export controlled information.

www.concordebattery.com